


AIRSPEED INDICATORS

AIRSPEED INDICATORS CAN BE ORDERED WITH RANGE MARKS FOR AN ADDITIONAL CHARGE.

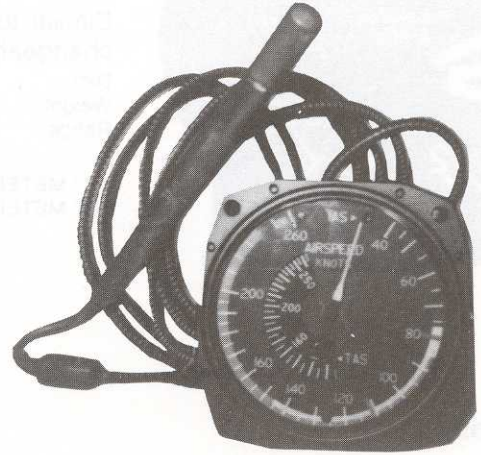

True Airspeed 3-1/8"

B-1006

40 to 240 MPH

Operates on same principle as other airspeed indicators. This model has an adjustable outside air temperature setting which allows the user to compute the True Airspeed.

DIALS AVAILABLE IN MPH, KNOTS OR DUAL SCALE MPH OUTER-KNOTS INNER OR KNOTS OUTER-MPH INNER.

This airspeed contains an altimeter diaphragm and temperature diaphragm which continually modify the magnifying ratio of the airspeed mechanism. The effects of density and temperature changes are continuously counteracted, thereby providing constant true airspeed. This indicator has a capillary tube with a temperature bulb that must be mounted through the fuselage.

3-1/8"
AIRSPEED RANGES
20-120 MPH
20-100 KNOTS
20-150 KNOTS
20-170 MPH
30-160 MPH
40-180 MPH
40-200 MPH
40-250 MPH
40-300 MPH
40-350 KNOTS
40-400 MPH
40-400 KNOTS

2-1/4"
AIRSPEED RANGES
20-100 KNOTS
20-120 MPH
30-160 MPH
40-200 MPH
40-250 MPH

WE EXCHANGE OR OVERHAUL YOURS.
CERTIFIED REPAIR STATION TJ2R189L.
1 FULL YEAR NO HASSLE WARRANTY.